
AGRIPOMP/SP0

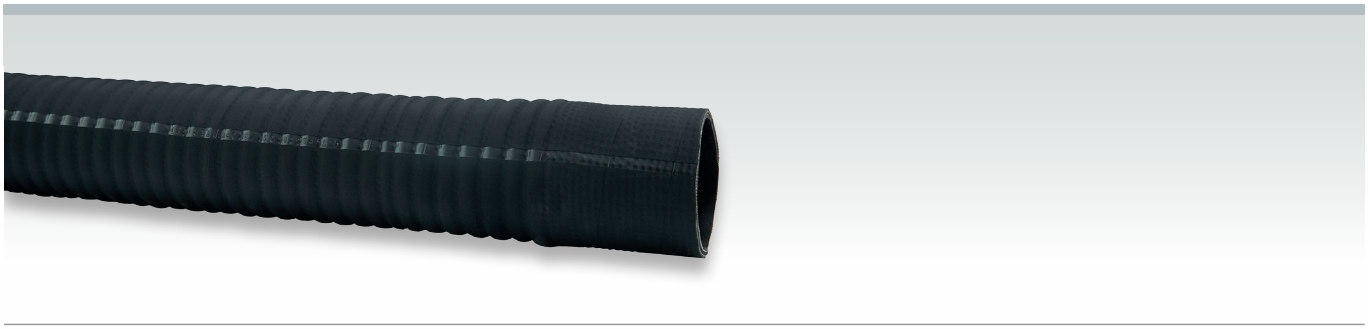

IT IMPIEGO

Tubo in gomma spiralato ondulato idoneo per aspirazione e leggera mandata di acqua e fluidi non corrosivi.

- **TEMPERATURA:** -30°C +70°C

STRUTTURA

- **Sottostrato**: liscio in gomma nera SBR.
- **Rinforzi**: spirale metallica incorporata con tessuti sintetici ad alta resistenza.
- **Copertura**: in gomma nera SBR/EPDM resistente all'abrasione e agli agenti atmosferici.
- **Superficie**: ondulata ad impressione tela.
- **Manicotti**: all'estremità.

Disponibile su richiesta
AGRIPOMP/SP10C: pressione esercizio 3 BAR.

EN APPLICATION

Hardwall corrugated cover rubber hose suitable for suction and light delivery of water and non corrosive fluids.

- **TEMPERATURE RANGE:** -30°C +70°C

CONSTRUCTION

- **Tube**: black, smooth SBR rubber.
- **Reinforcement**: steel wire helix with high strength syntetic textile plies.
- **Cover**: black, abrasion and weathering resistant SBR/EPDM rubber.
- **Surface**: corrugated fabric finished.
- **Soft cuffs**: at both ends.

Available on request:
AGRIPOMP/SP10C: working pressure 3 BAR.

DIAMETRO INTERNO INSIDE DIAMETER		SPESS. MANICOTTI CUFFS THICKNESS		PESO TEORICO WEIGHT		PRESSIONE ESERCIZIO WORKING PRESSURE		PRESSIONE SCOPPIO BURST PRESSURE		ASPIRAZ. VACUUM	RAGGIO CURVATURA BENDING RADIUS	
mm	inch	mm	inch	kg/mt	lbs/ft	bar	psi	bar	psi	bar	mm	inch
80	3.5/32"	6	0.24"	2.80	1.88	3	45	9	135	0.7	320	12.60
102	4"	7	0.28"	3.70	2.48	3	45	9	135	0.7	500	19.68
127	5"	8	0.32"	5.30	3.56	3	45	9	135	0.7	750	29.53
152	6"	9	0.35"	7.00	4.70	3	45	9	135	0.7	950	37.40
203	8"	11	0.43"	9.50	6.38	3	45	9	135	0.7	1200	47.24
254	10"	12	0.47"	16.00	10.75	3	45	9	135	0.7	1500	59.06
305	12"	13	0.51"	18.90	12.70	3	45	9	135	0.7	1900	74.80

Altri diametri e/o pressioni realizzabili su richiesta - Le caratteristiche e i dati tecnici possono essere modificati senza preavviso.

Other diameters and/or pressures are feasible upon request - The characteristics and technical data could be changed without warning.