
ARIA COMPRESSA/CM/40/Y

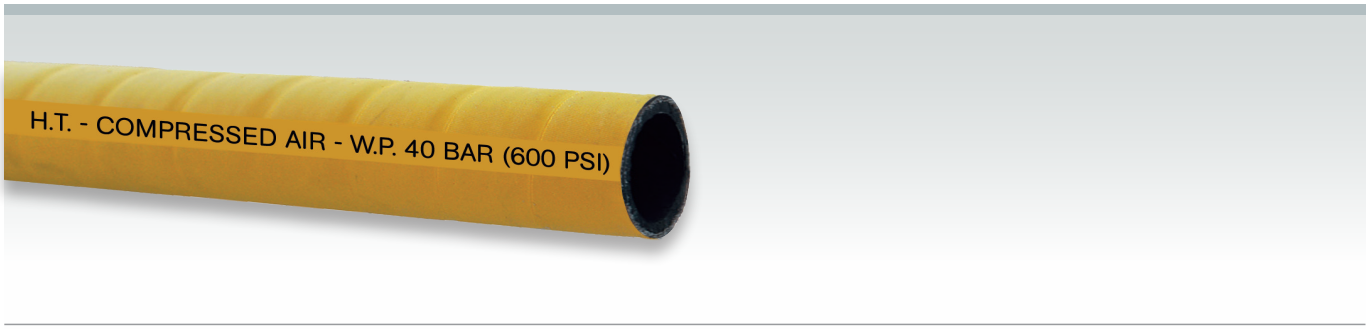

IT IMPIEGO

Tubo in gomma cord idoneo per aria compressa per impieghi gravosi. Utilizzato nelle miniere, nei cantieri ed in tutte le applicazioni dove sia richiesto un tubo robusto.

- **TEMPERATURA:** -30°C +80°C

STRUTTURA

- **Sottostrato**: liscio in gomma nera resistente a tracce di olii nebulizzati.
- **Rinforzi**: trefolo ottonato in acciaio armonico.
- **Copertura**: in gomma gialla resistente all'abrasione e agli agenti atmosferici.
- **Superficie**: liscia ad impressione tela.
- **Marcatura**: listino scritta nera "H.T. - COMPRESSED AIR - W.P. 40 BAR (600 PSI)".

EN APPLICATION

Softwall rubber hose suitable for heavy duty. Use for mining and yards.

- **TEMPERATURE RANGE:** -30°C +80°C

CONSTRUCTION

- **Tube**: black, smooth rubber oil mist resistant.
- **Reinforcement**: high strength steel wire yarn.
- **Cover**: yellow, abrasion and weathering resistant rubber.
- **Surface**: smooth fabric finished.
- **Branding**: black transfer tape lettering "H.T. - COMPRESSED AIR - W.P. 40 BAR (600 PSI)".

DIAMETRO INTERNO INSIDE DIAMETER		DIAMETRO ESTERNO OUTSIDE DIAMETER		PESO TEORICO WEIGHT		PRESSIONE ESERCIZIO WORKING PRESSURE		PRESSIONE SCOPPIO BURST PRESSURE		LUNGHEZZA LENGTH	
mm	inch	mm	inch	kg/mt	lbs/ft	bar	psi	bar	psi	mt	ft
19	3/4"	29	1.3/32"	0,54	0,37	60	900	190	2850	30.5-61	100-200
25	1"	36	1.15/32"	0,69	0,46	40	600	120	1800	30.5-61	100-200
32	1.1/4"	43	1.21/32"	1,07	0,72	40	600	120	1800	30.5-61	100-200
38	1.1/2"	50	1.7/8"	1,27	0,85	40	600	120	1800	30.5-61	100-200
51	2"	66	2.9/16"	1,99	1,34	40	600	120	1800	30.5-61	100-200
63	2.1/2"	80	3.5/32"	3,00	2,01	30	450	90	1350	30.5-61	100-200
76	3"	94	3.5/8"	3,80	2,55	30	450	90	1350	30.5-61	100-200

Altri diametri e/o pressioni realizzabili su richiesta - Le caratteristiche e i dati tecnici possono essere modificati senza preavviso.

Other diameters and/or pressures are feasible upon request - The characteristics and technical data could be changed without warning.