
HOT WATER/10NL - 20NL

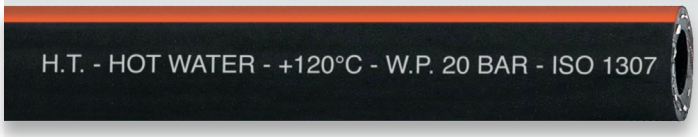

IT IMPIEGO

Tubo in gomma long length idoneo per mandata di acqua calda e liquidi antigelo.

- **TEMPERATURA:** -40°C +120°C

STRUTTURA

- **Sottostrato**: liscio in gomma nera EPDM resistente al calore.
- **Rinforzi**: inserzioni di filati sintetici ad alta resistenza.
- **Copertura**: in gomma nera EPDM resistente all'abrasione e agli agenti atmosferici.
- **Superficie**: liscia estrusa.
- **Marcatura**: ad inchiostro "H.T. - HOT WATER +120°C - W.P. 20 BAR - ISO 1307".

EN APPLICATION

Long length rubber hose suitable for delivery of hot water and anti-freeze liquids.

- **TEMPERATURE RANGE:** -40°C +120°C

CONSTRUCTION

- **Tube**: black, smooth heat resistant EPDM rubber.
- **Reinforcement**: high strength synthetic textile yarn.
- **Cover**: black, abrasion and weathering resistant EPDM rubber.
- **Surface**: smooth extruded.
- **Branding**: ink marking "H.T. - HOT WATER +120°C - W.P. 20 BAR - ISO 1307".

DIAMETRO INTERNO INSIDE DIAMETER		DIAMETRO ESTERNO OUTSIDE DIAMETER		PESO TEORICO WEIGHT		PRESS. ESERCIZIO WORKING PRESSURE		PRESS. SCOPPIO BURST PRESSURE		LUNGHEZZA LENGTH	
mm	inch	mm	inch	kg/mt	lbs/ft	bar	psi	bar	psi	mt	ft
10NL											
15	19/32"	23	29/32"	0.27	0.18	10	150	30	450	50	82
20NL											
8	5/16"	15	19/32"	0.18	0.12	20	300	60	900	40	131
10	3/8"	17	21/32"	0.21	0.14	20	300	60	900	40	131
13	1/2"	20	3/4"	0.25	0.16	20	300	60	900	40	131
16	5/8"	24	29/32"	0.27	0.18	20	300	60	900	40	131
19	3/4"	28	1.1/16"	0.39	0.26	20	300	60	900	40	131
25	1"	35	1.3/8"	0.58	0.39	20	300	60	900	40	131

Altri diametri e/o pressioni realizzabili su richiesta - Le caratteristiche e i dati tecnici possono essere modificati senza preavviso.

Other diameters and/or pressures are feasible upon request - The characteristics and technical data could be changed without warning.