


# NYLPA 66HD Fascette nylon - Nylon ties

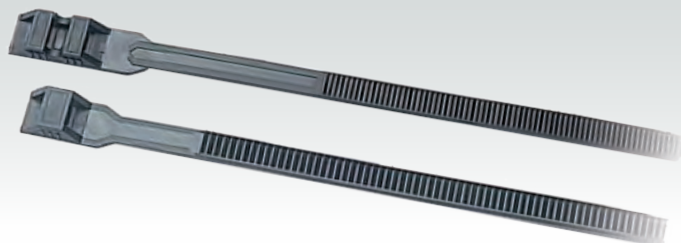

IT

Fascette in nylon 6.6 colore nero caricato carbon black per uso esterno, testina piatta, facile da usare, si inserisce anche a mano. Adatta per eseguire fissaggi dove è richiesta una elevata tenuta, resiste ai raggi UV.

EN

Nylon cable ties color black with flat single or double-locking head for a stronger wiring, heavy duty or external application, U.V. rays resistant.

DIMENSIONI mm DIMENSIONS mm	PEZZI PCS.	CODICE CODE	TENUTA MIN. Kg TENSILE STRENGTH Kg	MAX UTILE mm MAX BUNDLE mm
200x9	100	HTNS9200	40	40
260x9	100	HTNS9260	40	50
290x9	100	HTNS9290	60	75
380x9	100	HTNS9380	60	295
390x9	100	HTNS9390	60	105

# NYLPA 12 Fascette nylon - Nylon ties

IT

Fascette in nylon 12 colore nero, testina piatta, ottima resistenza agli agenti atmosferici e particolarmente indicata in ambienti marini. Si utilizza con l'utensile HT-NUT8523.

EN

Nylon cable ties color black flat single or double-locking head for a stronger wiring. Excellent resistance to atmospheric agents, especially recommended to outer installation and sea environment; form mounting use tool HTNUT8523.

## NYLON 12

DIMENSIONI mm DIMENSIONS mm	PEZZI PCS.	CODICE CODE	TENUTA MIN. Kg TENSILE STRENGTH Kg	MAX UTILE mm MAX BUNDLE mm
180x9	100	HTNS9180	35	45
260x9	100	HTNS9260	51	60
360x9	100	HTNS9360	51	100

## NYLON 6.6

TEMPERATURA UTILIZZO TEMPERATURE OF USE	
Di esercizio - Of use	-40°C + 85°C
Di montaggio - Of assembly	-10°C + 60°C
Punta max - Max tip short period	+110°C
Di fusione - Of fusion	+256°C

## RESISTENZA AGLI AGENTI ESTERNI EXTERNAL AGENTS RESISTANCE

Basi olii, grassi, saponi, detersivi, prodotti petroliferi, solventi clorurati, alcoli - **tenuta limitata agli acidi.**  
Bases oils, greases, soaps, detergents, oil products, chloride solvents, alcohols - **limited held to acids.**