
TT/ECO/ZINC

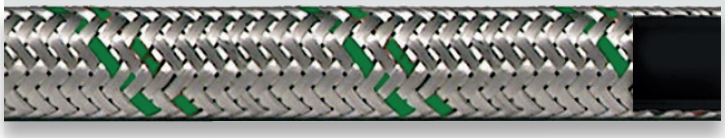

IT IMPIEGO

Trafilato in gomma trecciato in acciaio zincato Idoneo per mandata di oli minerali, gasolio e benzine ecologiche con contenuto aromatico non superiore al 50%, Biodiesel, HVO

- **TEMPERATURA:** -20°C +120°C; (passaggio aria calda +90°C)

STRUTTURA

- **Sottostrato**: trafilato monoestruso liscio in gomma nera speciale NBR.
  Durezza Shore A: 80 ± 5
- **Rinforzi/Copertura**: trecciatura di filo acciaio zincato con filo di identificazione verde.
- **Superficie**: trecciata in acciaio zincato.

EN APPLICATION

Galvanized steel wire braided one-layer rubber hose suitable for loading diesel and unleaded fuels, Biodiesel, HVO.

- **TEMPERATURE RANGE:** 20°C +120°C; (Use for hot air +90°C).

CONSTRUCTION

- **Tube**: special black rubber NBR, smooth single extruded drawn.
  Hardness Shore A: 80 ± 5
- **Reinforcement/Cover**: galvanized steel wire braiding with green identification wire.
- **Surface**: galvanized braided finished.

DIAMETRO INTERNO INSIDE DIAMETER		DIAMETRO ESTERNO OUTSIDE DIAMETER		PESO TEORICO WEIGHT		PRESSIONE ESERCIZIO WORKING PRESSURE		PRESSIONE SCOPPIO BURST PRESSURE		RAGGIO CURVATURA BENDING RADIUS		LUNGHEZZA LENGTH	
mm	inch	mm	inch	kg/mt	lbs/ft	bar	psi	bar	psi	mm	inch	mt	ft
5	3/16"	10	3/8"	0.14	0.09	25	375	75	1125	25	1"	100	328
6	1/4"	11	7/16"	0.16	0.11	25	375	75	1125	30	1.18"	100	328
8	5/16"	13	1/2"	0.23	0.15	25	375	75	1125	40	1.57	100	328
10	3/8"	15	19/32"	0.28	0.19	25	375	75	1125	50	1.97"	100	328
13	1/2"	19	3/4"	0.38	0.26	20	300	60	900	65	2.56"	100	328
16	5/8"	22	7/8	0.46	0.31	20	300	60	900	80	3.15"	50	164
19	3/4"	25	1"	0.57	0.38	15	225	45	675	95	3.74"	50	164
25	1"	33	1.5/16"	0.66	0.44	15	225	45	675	125	4.92"	50	164

Altri diametri e/o pressioni realizzabili su richiesta - Le caratteristiche e i dati tecnici possono essere modificati senza preavviso.

Other diameters and/or pressures are feasible upon request - The characteristics and technical data could be changed without warning.