
TT/PTFE/INOX

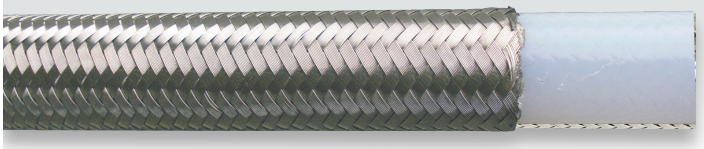

GMP CE 2023/2006 · PHTALATE FREE · FDA · CE 1935:2004 · BPA BISFENOLO FREE

IT IMPIEGO

Trafilato in P.T.F.E trecciato in acciaio inox idoneo per impianti idraulici, circuiti di lubrificazione, passaggio carburanti e vapori a alta temperatura.

Normative: MOCA - Conforme al regolamento CE 10/2011 1935:2004 per simulanti A,B,C,D_2, F.D.A. CFR21, senza PHTALATI e BISFENOLI (BPA).

- **TEMPERATURA:** -70°C +260°C

STRUTTURA

- **Sottostrato**: P.T.F.E estruso.
- **Rinforzi/Copertura**: trecciatura di filo acciaio inox AISI 304.
- **Superficie**: trecciata.

Disponibile su richiesta:
TT/PTFE/INOX/2TR doppia treccia INOX.
TT/PTFE/CON/INOX convoluto.

EN APPLICATION

Stainless wire braided one-layer P.T.F.E hose suitable for hydraulic and lubrificant system, fuel and steam high temperature delivery.

Standards: MOCA - Compliant with EC regulation 10/2011 - 1935:2004 for simulants A,B,C,D_2, F.D.A. CFR21, without PHTHALATES and BISPHENOLS (BPA).

- **TEMPERATURE RANGE:** -70°C +260°C

CONSTRUCTION

- **Tube**: P.T.F.E one-layer.
- **Reinforcement/Cover**: stainless AISI 304 wire braid.
- **Surface**: braided.

Available on request:
TT/PTFE/INOX/2TR double INOX braided.
TT/PTFE/CON/INOX convoluted.

DIAMETRO INTERNO INSIDE DIAMETER		SPESSORE THICKNESS		DIAMETRO ESTERNO OUTSIDE DIAMETER		PRESSIONE ESERCIZIO WORKING PRESSURE		PRESSIONE SCOPPIO BURST PRESSURE		RAGGIO CURVATURA BENDING RADIUS		LUNGHEZZA LENGTH	
mm	inch	mm	inch	mm	inch	bar	psi	bar	psi			mt	ft
3.2	1/8"	0.7	± 0.10	5.8	1/4"	250	3750	1000	15000	35	1.38"	>10	>32.8"
5	3/16"	0.7	± 0.10	7.6	5/18"	200	3000	800	12000	45	1.77"	>10	>32.8"
6.5	1/4"	0.7	± 0.10	9	11/32"	175	2625	700	10500	60	2.36"	>10	>32.8"
8	5/16"	0.7	± 0.10	11	7/16"	150	2250	600	9000	65	2.56"	>10	>32.8"
9.5	3/8"	0.7	± 0.10	12.3	15/32"	135	2025	540	8100	80	3.15"	>10	>32.8"
13	1/2"	0.7	± 0.10	16.2	5/8"	120	1800	480	7200	100	3.94"	>10	>32.8"
16	5/8"	0.7	± 0.10	19	3/4"	100	1500	400	6000	150	5.90"	>10	>32.8"
19	3/4"	0.8	± 0.10	23.1	7/8"	90	1350	360	5400	200	7.88"	>10	>32.8"
25	1"	0.8	± 0.10	29.2	1.5/32"	65	975	260	3900	260	10.24"	>10	>32.8"

Altri diametri e/o pressioni realizzabili su richiesta - Le caratteristiche e i dati tecnici possono essere modificati senza preavviso.

Other diameters and/or pressures are feasible upon request - The characteristics and technical data could be changed without warning.